



E.P.SYSTEMES

PNEUMATIC SKIMMER

Pneumatic pump SPP2-TL


Material :

SS304 casing, SS Top loading inlet, reinforced Epoxy float, HDPE mecanisms, SS316 Spring, SS 304 Non return valve, SS 316 Barbs connectors. Total Fluid pumping
Applications : Remediation (LNAPLS)

Version	Pump O.D	Total OD	Length
Top Loading	4,5 cm	4,5 cm	77,5 cm
Total Length	weight	Max flox rate	Volum /cycle
86 cm	3kg	6,5 L/min	0.3 L
Depth maxi	Max Air pressure	H.M.A mini	Coeff. multiplicateur
60 m	8 bars	50 cm	2,5

Test characteristics

- Air consumption : 2,5 m³/h of air for 1m³/h of water
- Air pressure : 6 bars

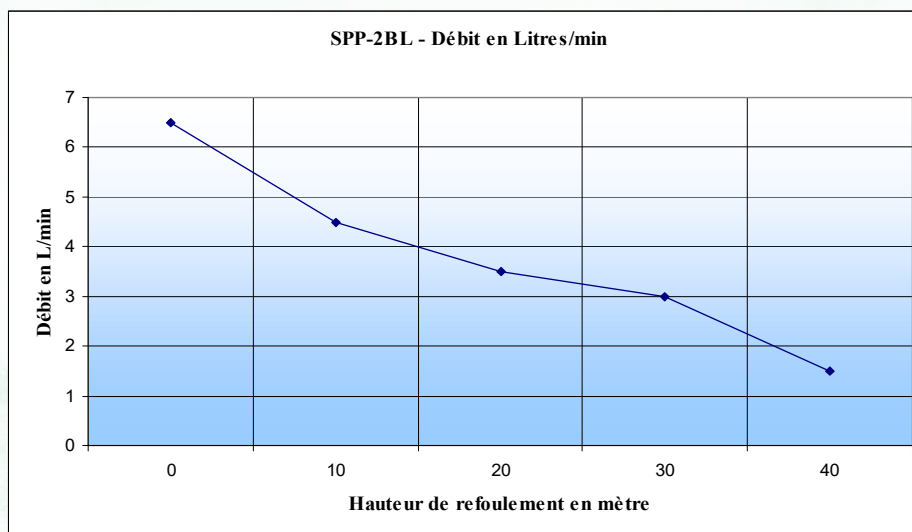

Nota : Flow rates are given for indciation and could be different on site upon sites specifications.

Siège social :

22 rue Gustave Eiffel – Technoparc
78 300 POISSY
Tél. : 33-06-77-70-80-93

Ex h IIC T Gb



contact@epssystemes.com