

# PNEUMATIC SKIMMER


## Pneumatic Pump SPP3/TL

### Material :

SS 304 Casing, SS 316 Non return Top valve, SS 316 Inlet screen, Reinforced Epoxy internal float, HDPE mecanisms, SS 316 spring, SS 316 Barbs connectors

Application : Total fluid. Remediation, LNAPLs.

VERSION	Pump O.D	Total OD	Length
TOP LOADING	7 cm	7,7 cm	104 cm
Total Length	Weight	Maxi Flow rate	Volum /cycle
119 cm	6 kg	16 L/min	0.9 L
Depth max	Max Air Pressure	H.M.A mini	Air Coef
65 m	8 bars	82 cm	4

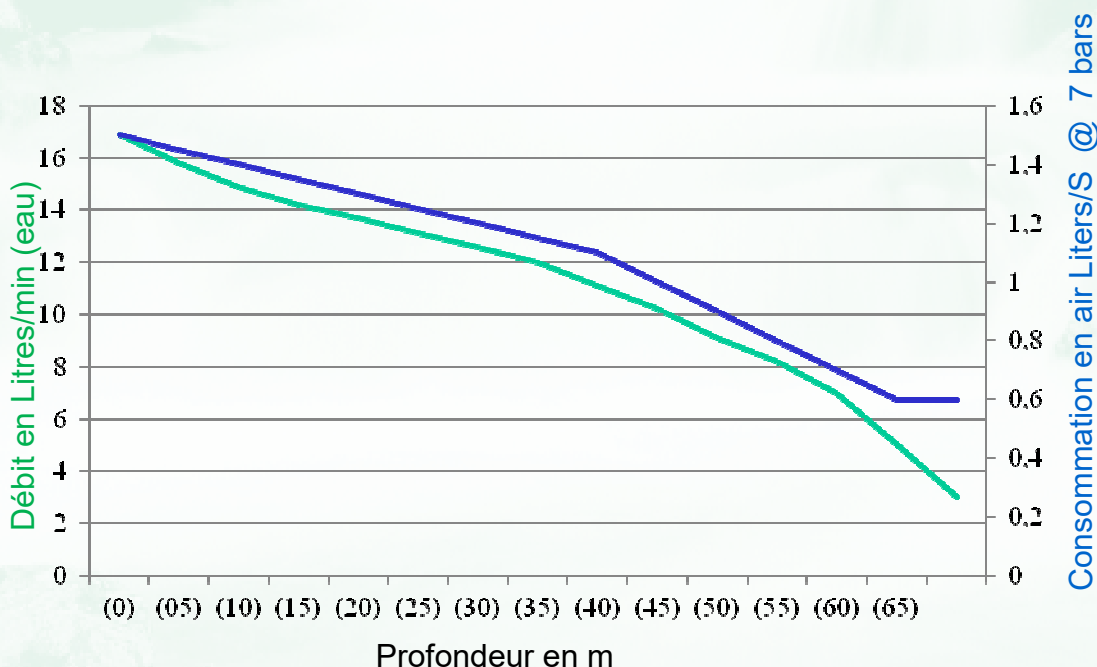

**Nota :** Flow rate could be different on site due to the refill of the product or water.

**Our pumps are 100% manufactured in France and are 2 years warrantied**

