



E.P. SYSTEMES

Leachate and Waste water

Pneumatic pump SPP4L-BL

Material :


SS Casing in 304 (316 Option), HDPE foot Valve , SS 304 inlet screen, Reinforced Epoxy float , mécanisme Derlin mecansims, SS316 spring, SS 316 non return top valve, SS 316 Barbs connectors for air in, discharge and exhaust air. All kind of luiquid can be pumped.

Our Pneumatic pumps SPP are 2 years warranted.

Type admission	Øext.	Øext. Total	Length
Bottom loading	8,9 cm	8,9 cm	136 cm
Total Length	Weight	Max Flow rate	Volume /cycle
147 cm	8 kg	45 L/min	2,6 l
Depth max	Air pressure	H.M.A mini	Coeff. multiplicateur
70 m	8 bars	100 cm	5

TEST CHARACTERISTICS

- Air consumption : 5 m³/h for 1.2 m³/h of water
- Air pressure : 8bars.
- Submerence test :60 cm

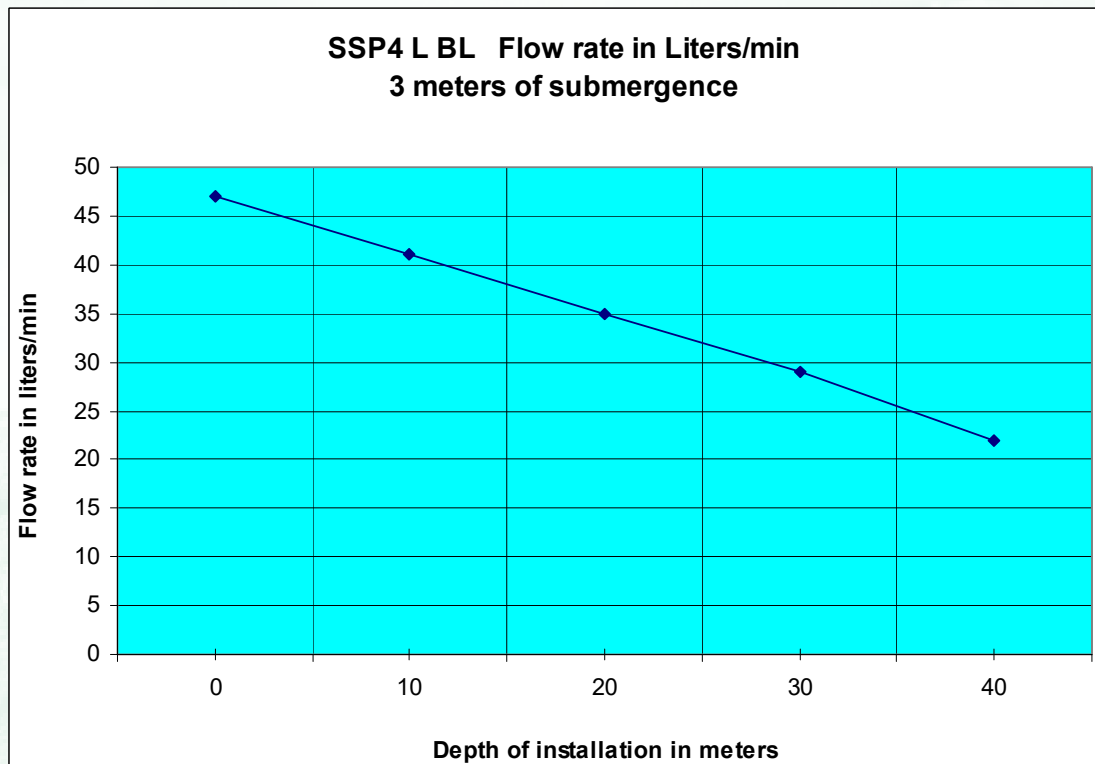

Nota : Flow rate could be different upon recharge of leachate or refill water.

Siège social :
22 Rue Gustave Eiffel – Technoparc
F- 78300 POISSY
Tél. : 33-06-77 70 80 93

Ex h IIC T Gb



CONTACT@EPSYSTEMES.COM