



E.P. SYSTEMES

Total Fluid Pneumatic Pump

Pneumatic pump model SPP mini –TL (Top Loading)

Material :

SS 304 Casing, SS 316 Non return Top valve, SS 316 Inlet screen, Reinforced Epoxy internal float, HDPE mecanisms, SS 316 spring, SS 316 Barbs connectors


Application : Total fluid. Remediation, leachate.

Version	ØD ext.	Total Ø ext.	Length
Top Loading	7 cm	7 cm	73 cm
Total length	Weight	Max flow rate	Volume /cycle
104 cm	4kg	13 L/min	0.5 L
Depth maxi	Air pressure max	H.M.A mini	Air/water cons
60 m	8 bars	30 cm	4



Test characteristics

- Air consumption : 4 m³/h of air for 1 m³/h of water
- Air Pressure : 8 bars

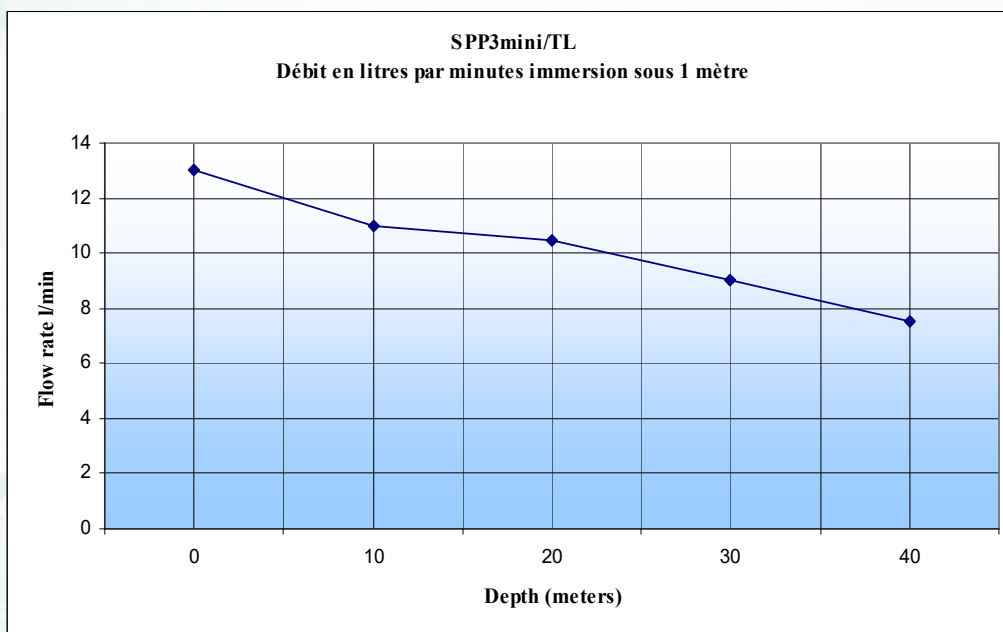

Ex h IIC T Gb

Nota : Flow rate could be different on site due to the refill of the product or water.

Our pumps are 100% manufactured in France and are 2 years warrantied

Siège social :

22 rue Gustave Eiffel - Technoparc

F-78 300 POISSY - FRANCE

Tél. : 33-06-47-10-38-13

contact@epssystemes.com

www.epssystemes.com